
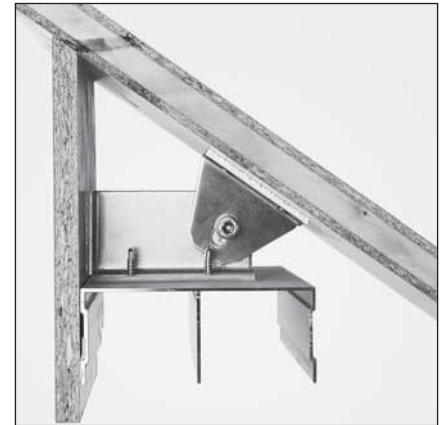


SLIDING DOOR SYSTEMS: INSTALLATION INSTRUCTIONS INSTALLATION ANGLE FOR SLOPING CEILINGS

5th edition Bremen, January 2006

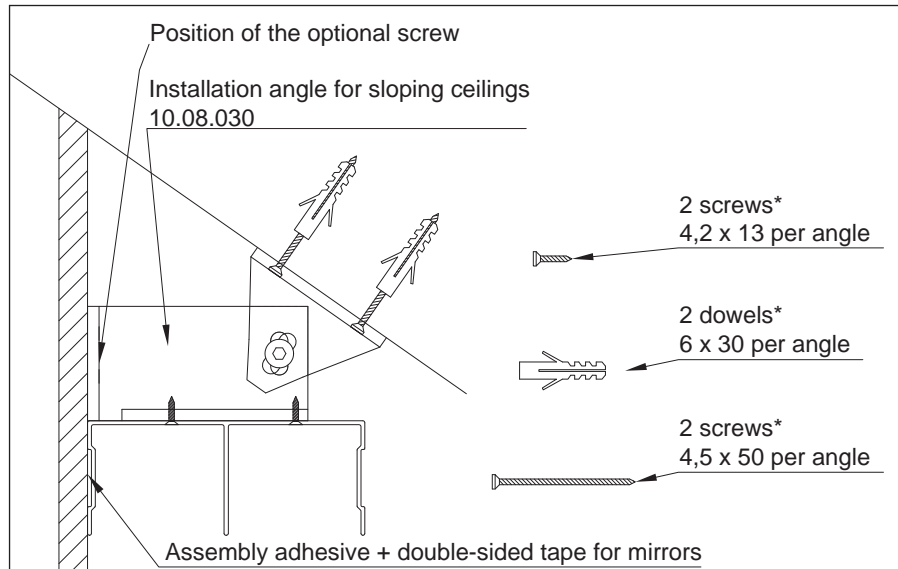

*not included in delivery

- 1**_First, cut the top track to the exact length. Mount the installation angle for sloping ceilings onto the top track so that the faceplate holder is flush with the front edge of the top track. Use the enclosed screws for the installation. They will be screwed through the top track in the underside of installation angle for sloping ceilings.
- 2**_Screw the installation angle for sloping ceilings to the substructure unit using the Allen screw, nut, and washer and then lightly tighten the nut using your hand. Then hold the installation angle for sloping ceilings together with the top track on the wall, level everything horizontally, and screw down the set screws.
- 3**_Position the system and mark the installation holes on the sloping ceiling.
- 4**_Unscrew the top parts from the bottom parts and attach the top parts using screws and dowels to the designated position. It is important for the installation to be done appropriately. Now the top track is put back into position, aligned, and tightened using the Allen screw.
- 5**_You can close the gap between the sloping ceiling and underside of the top track using a faceplate. (The faceplate can be screwed onto the faceplate holder, glued with adhesive, or attached with double-sided tape. Thereby the faceplate stays attached to the top track and the adjustment can be slanted with planes.
- 6a**_Attach double-sided mirror tape to keep the faceplate mounted until the adhesive has completely dried (suitable adhesive). With faceplates thicker than 10 mm or higher than 250 mm, it is necessary to additionally secure it with screws, one per 500 mm of faceplate.
- 6b**_When choosing screws it is important to pay attention to their length so that the front of the faceplate is not damaged (dependent upon the thickness of the faceplate). In order to avoid damaging the faceplate, first take off the top track and then screw the faceplate (back-mounted) to the installation angle for sloping ceilings.
- 6c**_Apply the adhesive and the double-sided tape to the top track and then affix the top track onto the installation angle for sloping ceilings. Attach the faceplate with double-sided tape and adhesive to the top track.

easy medium difficult *

Manufacturing

raumplus

*Base for the degree of difficulty is a standard sliding door without slant. This is to be classified as ‚easy‘ in respect of production and installation.