


INTERIOR SYSTEM: PLANNING, ASSEMBLY AND INSTALLATION INSTRUCTION

SYSTEM UNO

Version 8.0 (2016-09-22)

5.11.3.c



Subject to technical changes.

raumplus

CONTENT AND TOOLS

CONTENT:

Content and tools	page	03
Accessories	page	04
Cutting dimensions	page	05
Assembly examples/measurement	page	06
Detail drawings	page	08
Assembly instruction	page	09
Inastallation instruction	page	10
Accessories		
Pull out trouser with panel	page	14
Clothes lift	page	16
Uno 45 ° wall mounting	page	17
Clothes rod corner shelf	page	18
LED lighting clothes rod	page	19

TOOLS:

(without claim of completeness)

- Allen key set
- Drilling machine
- Drill set metall / stone
- Cross tip screwdriver
- Measuring tools
- Pencil
- Rubber mallet
- Threading tool 10 mm
- Water level
- Open-ended spanner 14 mm



VERSION INFORMATION:








Version: 7.2: Item number adjusted page / various changes
7.5: calculation height
8.0: Accessories added

PRODUCT INFORMATION

GENERAL INFORMATION: Preparation

- This manual is part of the product and describes the safe and proper installation of the system. Read the instruction carefully before installation
- Please note that the assembly should only be done by qualified and trained staff in strict compliance with all details indicated in this document. Improper installation in variation from manufacturer's specification may cause defects and danger, thus endangering the safe fixing of the product as well as the safety of the prospective user. The liability of the manufacturer shall be excluded in case of defects and consequential damages resulting from incorrect assembly of this product.
- Please check the completeness of the delivered parts and check carefully if any transport damages are visible
- If any parts are damaged or lost, please immediately contact the responsible supplier.
- It is assumed that you have exactly identified all cutting dimensions according to the measurement instruction for **raumplus**-products

SYMBOLS:


Symbol	Importance
	Risk or danger!
	Advice and information
	Additional information / other documents
	Directional data / direction of movement
	„yes“ and „right“
	„no“ and „wrong“
	Follow the order

SYSTEM:


System Information: UNO

- min./max. depth of element = 300 mm / 330 mm / 600 mm
- min./max. height of element = 500 mm / 500 mm / 3000 mm
- min./max. width of element = 100 mm / 300 mm / 1248 mm
**without / with
drawer corpus**


ACCESSORIES




1_ 80.01.020




2_ 80.20.040




3_ 80.20.060




4_ 80.40.050




5_ 80.40.020




6_ 80.20.080




7_ 80.40.025




8_ 80.20.015




9_ 80.20.010



10_ 80.20.090



11_ 80.23.020 / 80.23.025









12_ 80.40.035

- | | | |
|---|-------|-----------------|
| 1_ Carrier profile | | |
| 2_ Wall- and ceiling connection | | |
| 3_ Profile connection | | |
| 4_ Universal carrier | | |
| 5_ L-carrier L/R | | |
| 6_ Corner connection | | |
| 7_ Attachment for glass shelf carrier | | |
| 8_ Adjustment foot | | |
| 9_ Transition piece | | |
| 10_ End cap | | |
| 11_ Clothes rod, round & PVC rod | | |
| 12_ Rod carrier round Uno | | |
| without illustration: | | |
| 13_ Tie holder L/R | / 191 | |
| 14_ Hook rail L/R | | 80.22.092 / 192 |
| 15_ Scarf holder L/R | | 80.22.093 / 193 |
| 16_ Pull-out trouser incl. front panel | | ACC-HOAZU01N |
| 17_ Clothes lift 440 up to 1200 mm | | ACC-LIFx |
| 17a_ Adapter for clothes lift | | 80.22.098 |
| 18_ Clothes rod corner connector | | 80.22.05x |
| 19_ Mitre connector | | 80.x0.x70 |
| 20_ Rubber pad for mitre connector (optional) | | 80.20.975 |
| 21_ Profile connector for LED rod | | 80.20.065 |
| 22_ Rod carrier LED, round | | 80.40.037 |
| 23_ LED clothes rod | | 80.24.0xx |
| 24_ Cover profile for LED rod | | 80.24.010 |
| 25_ Clothes rod corner connector LED | | 80.22.15x |
| 26_ Clothes rod oval | | 80.22.050 |
| 26a_ Rod carrier L/R | | 80.40.030 |

CUTTING DIMENSIONS

Shelves up to max. 1248 mm
Profiles up to max. 3000 mm

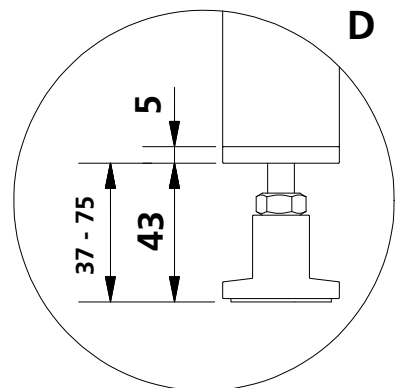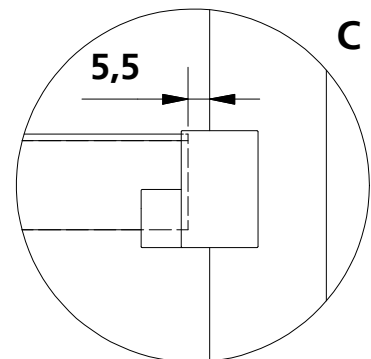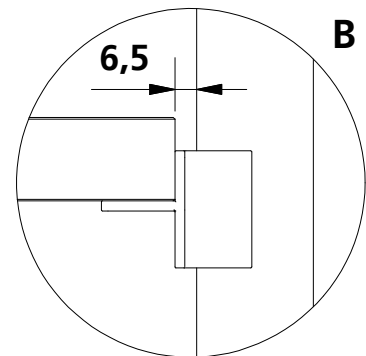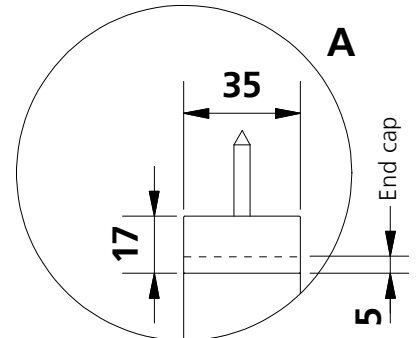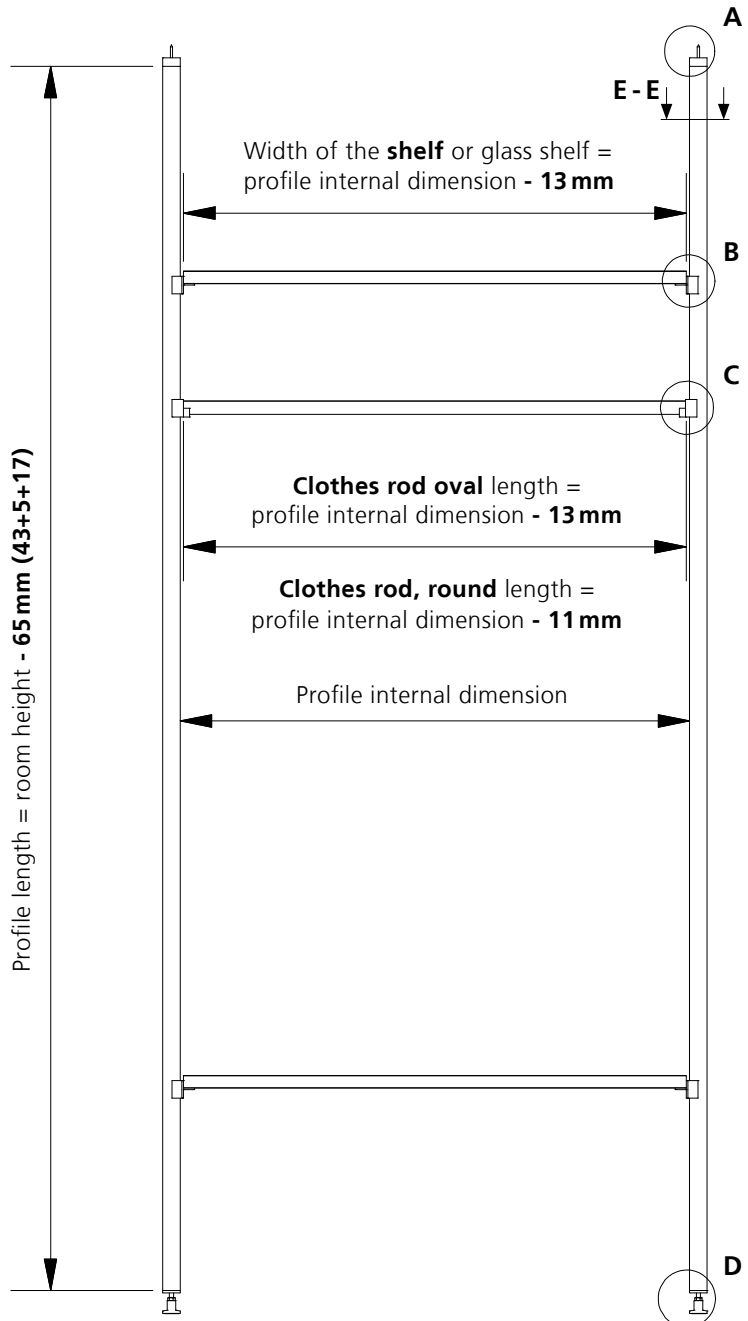

Distance from wall:

Shelf - wall = 10 mm (standard)

Wallconnection:

Length **carrier profile** = (shelf depth : 2) - 41 mm

MEASUREMENTS

Bending of shelves


Glass ESG	thickness =	8 mm	length in mm:	1248	1125	1000	825	750	
	<u>width =</u>	460 mm	<u>deflection in mm</u>	<u>9,6</u>	<u>7,0</u>	<u>4,9</u>	<u>2,8</u>	<u>2,1</u>	
	burden linear	55 kg	average utilization in %:	33,0	29,7	26,4	21,8	19,8	
	"	thickness =	10 mm	length in mm:	1248	1125	1000	825	750
	<u>width =</u>	460 mm	<u>deflection in mm</u>	<u>4,9</u>	<u>3,6</u>	<u>2,5</u>	<u>1,4</u>	<u>1,1</u>	
	burden linear	55 kg	average utilization in %:	21,1	19,0	16,9	13,9	12,7	
	"	thickness =	8 mm	length in mm:	1248	1125	1000	825	750
	<u>width =</u>	600 mm	<u>deflection in mm</u>	<u>7,3</u>	<u>5,4</u>	<u>3,8</u>	<u>2,1</u>	<u>1,6</u>	
	burden linear	55 kg	average utilization in %:	25,3	22,7	20,2	16,7	15,2	
"	thickness =	10 mm	length in mm:	1248	1125	1000	825	750	
<u>width =</u>	600 mm	<u>deflection in mm</u>	<u>3,8</u>	<u>2,7</u>	<u>1,9</u>	<u>1,1</u>	<u>0,8</u>		
burden linear	55 kg	average utilization in %:	16,2	14,6	12,9	10,7	9,7		
"	thickness =	8 mm	length in mm:	1248	1125	1000	825	750	
<u>width =</u>	460 mm	<u>deflection in mm</u>	<u>3,5</u>	<u>2,5</u>	<u>1,8</u>	<u>1,0</u>	<u>0,8</u>		
Burden linear	20 kg	average utilization in %:	12,0	10,8	9,6	7,9	7,2		
"	thickness =	10 mm	length in mm:	1248	1125	1000	825	750	
<u>width =</u>	460 mm	<u>deflection in mm</u>	<u>1,8</u>	<u>1,3</u>	<u>0,9</u>	<u>0,5</u>	<u>0,4</u>		
burden linear	20 kg	average utilization in %:	7,7	6,9	6,1	5,1	4,6		
"	thickness =	8 mm	length in mm:	1248	1125	1000	825	750	
<u>width =</u>	600 mm	<u>deflection in mm</u>	<u>2,7</u>	<u>1,9</u>	<u>1,4</u>	<u>0,8</u>	<u>0,6</u>		
burden linear	20 kg	average utilization in %:	9,2	8,3	7,4	6,1	5,5		
"	thickness =	10 mm	length in mm:	1248	1125	1000	825	750	
<u>width =</u>	600 mm	<u>deflection in mm</u>	<u>1,4</u>	<u>1,0</u>	<u>0,7</u>	<u>0,4</u>	<u>0,3</u>		
burden linear	20 kg	average utilization in %:	5,9	5,3	4,7	3,9	3,5		
Chipboard	thickness =	25 mm	length in mm:	1248	1125	1000	825	750	
	<u>width =</u>	460 mm	<u>deflection in mm</u>	<u>9,2</u>	<u>6,7</u>	<u>4,7</u>	<u>2,6</u>	<u>2,0</u>	
	burden linear	55 kg	average utilization in %:	14,1	12,7	11,3	9,3	8,4	
	"	thickness =	25 mm	length in mm:	1248	1125	1000	825	750
<u>width =</u>	600 mm	<u>deflection in mm</u>	<u>7,0</u>	<u>5,1</u>	<u>3,6</u>	<u>2,0</u>	<u>1,5</u>		
burden linear	55 kg	average utilization in %:	10,8	9,7	8,6	7,1	6,5		
"	thickness =	25 mm	length in mm:	1248	1125	1000	825	750	
<u>width =</u>	460 mm	<u>deflection in mm</u>	<u>3,3</u>	<u>2,4</u>	<u>1,7</u>	<u>1,0</u>	<u>0,7</u>		
burden linear	20 kg	average utilization in %:	5,1	4,6	4,1	3,4	3,1		
"	thickness =	25 mm	length in mm:	1248	1125	1000	825	750	
<u>width =</u>	600 mm	<u>deflection in mm</u>	<u>2,6</u>	<u>1,9</u>	<u>1,3</u>	<u>0,7</u>	<u>0,6</u>		
burden linear	20 kg	average utilization in %:	3,9	3,5	3,1	2,6	2,4		



Attention: If the glass is damaged, the weight capacity decreases.
Do not exceed the maximum weight allowable.

DETAIL DRAWING

EXPLODED DRAWING

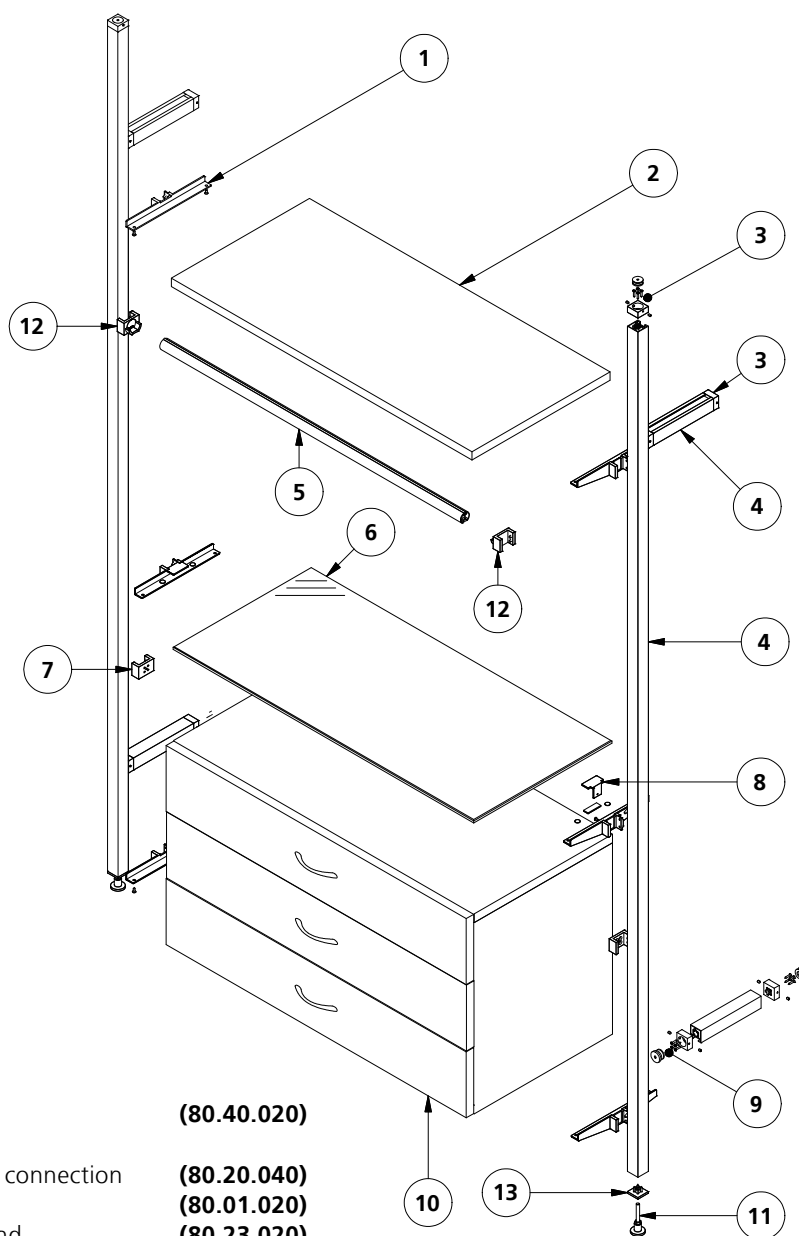


object	quantity	description	
1	6	L-carrier	(80.40.020)
2	1	Shelf	
3	6	Wall and ceiling connection	(80.20.040)
4	6	Carrier profile	(80.01.020)
5	1	Clothes rod round	(80.23.020)
6	1	Uno glass shelf	
7	2	Universal carrier	(80.40.050)
8	2	Attachment for glass shelf carrier	(80.40.025)
9	4	Profil connection	(80.20.060)
10	1	Drawer corpus compl.	
11	2	Adjustment foot	(80.20.015)
12	2	Rod carrier round	(80.40.035)
13	2	Transition piece	(80.20.010)

ASSEMBLY INSTRUCTIONS



In the area of clothes lift and drawer corpus are always wall connections to provide


Set the profile connector in the carrier profile, align and fix it.

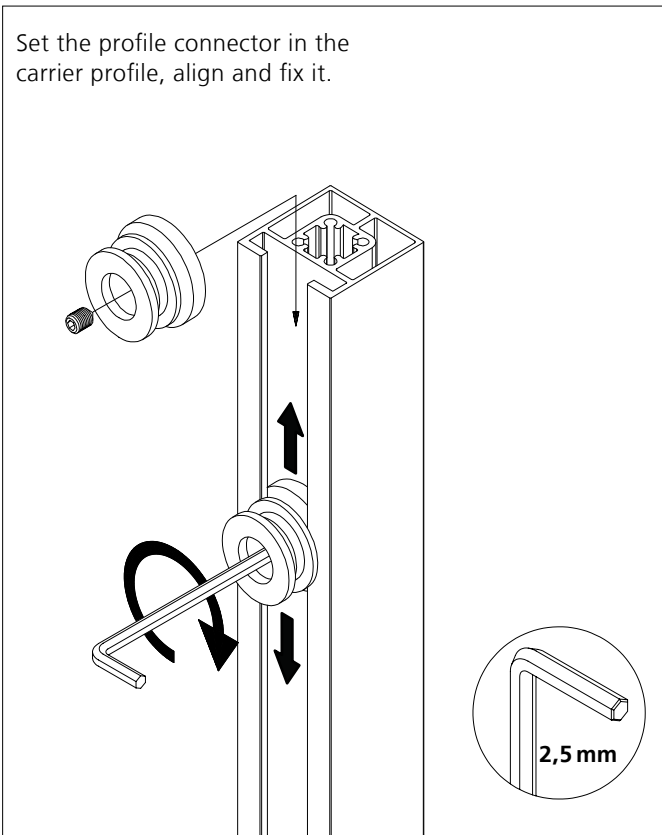

1_ Assembly of the profile connection for wall mounting


1. Pre-assemble the profile connection.

2. Put the profile connection and carrier profile on the brass bushing and fix it.

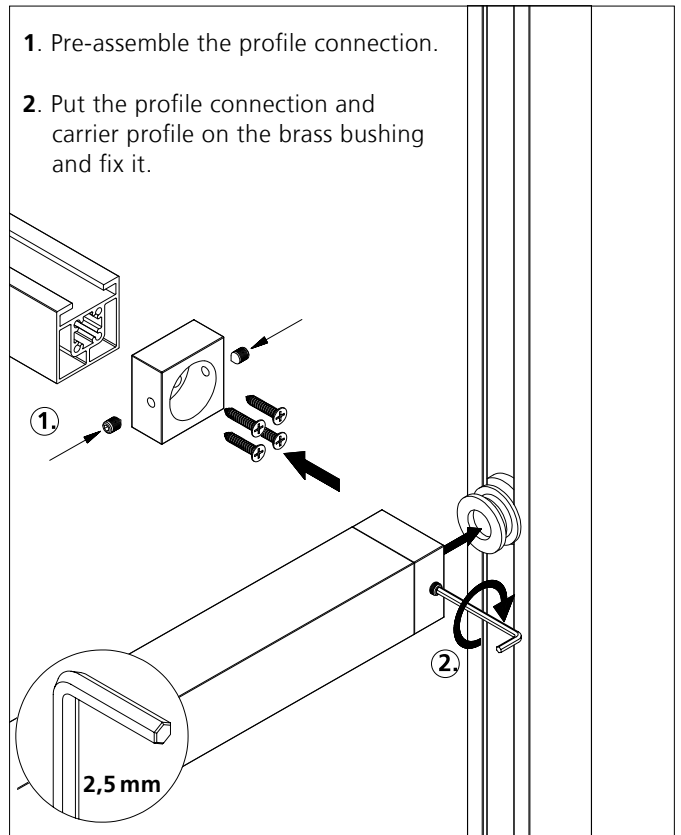


2_ Assembly of the profile connection

1. Pre-assemble the wall- and ceiling connection.
2. Mount the brass bush to the wall and ceiling, put the profile connection and carrier profile on the brass bush and fix it.

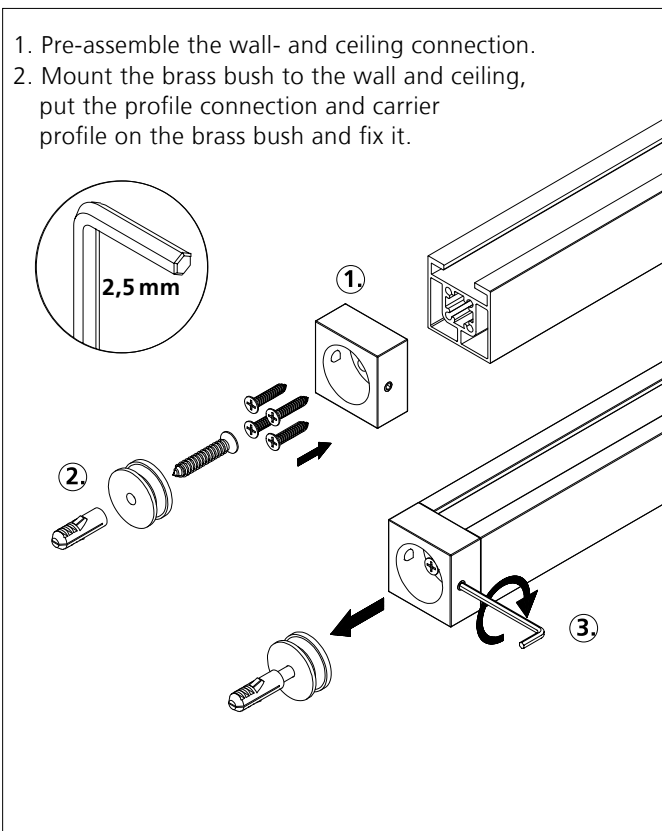

3_ Assembly of the wall- and ceiling connection

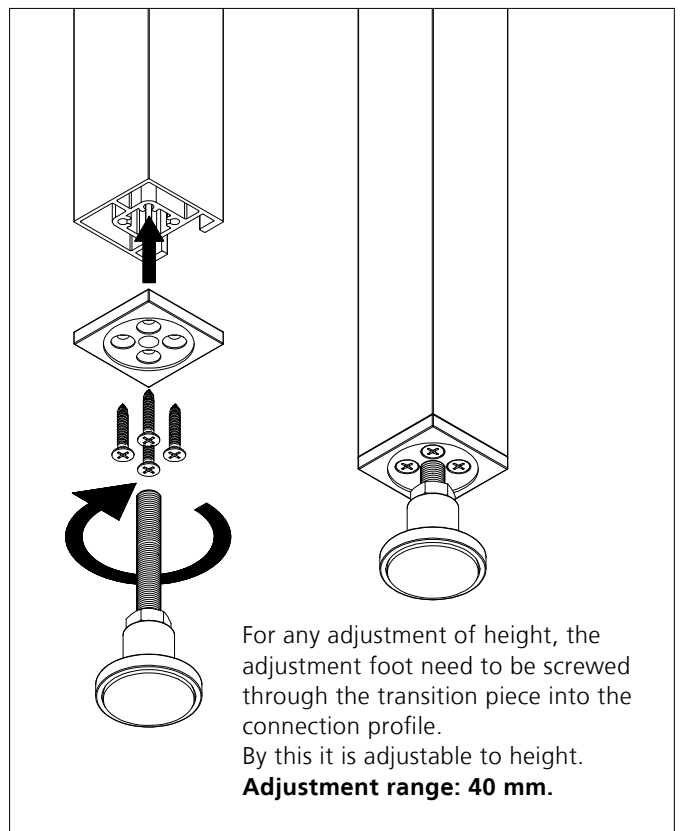


For any adjustment of height, the adjustment foot need to be screwed through the transition piece into the connection profile.
By this it is adjustable to height.
Adjustment range: 40 mm.

4_ Insert adjustment foot


INSTALLATION INSTRUCTIONS




At a ceiling attachment you have to make a additional attachment to the wall.
 If there is no attachment to the ceiling is possible, you have to plan with two wall connectors per profile to the wall.

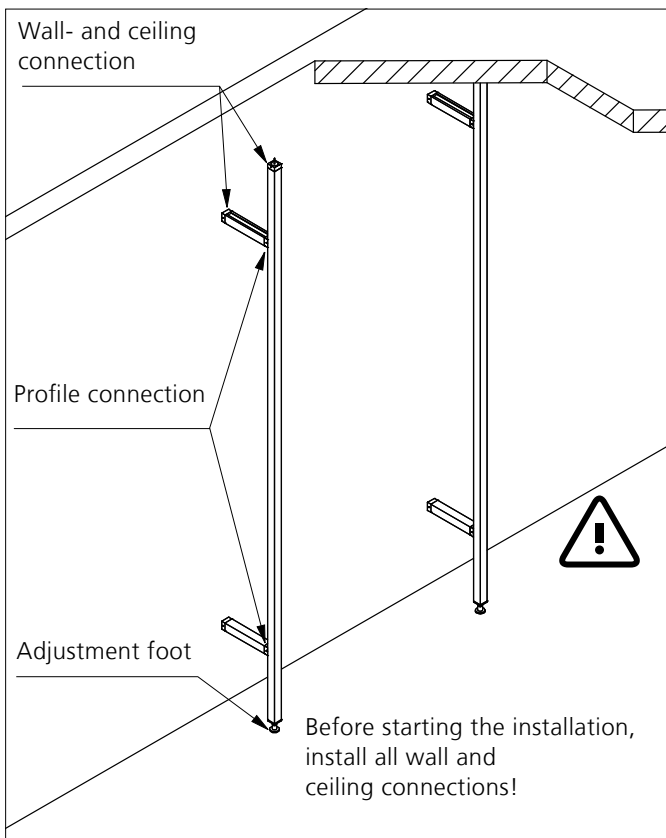


1_ Installation examples

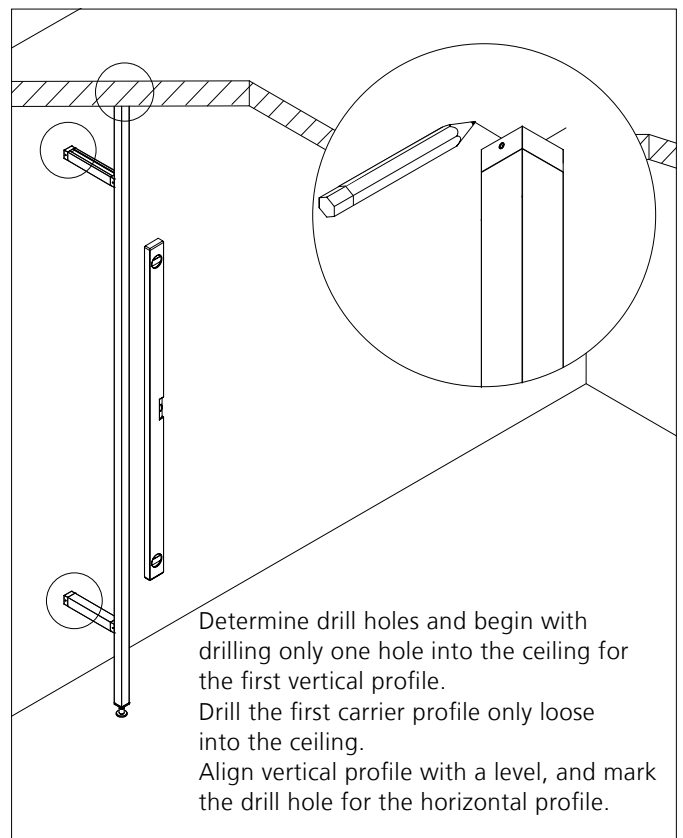

2_ Mark the holes

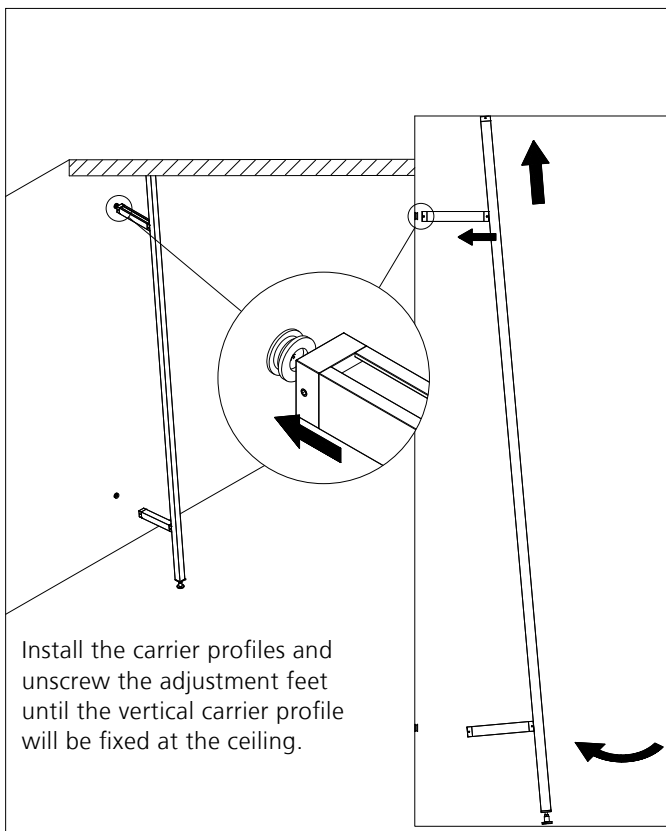


3_ Insert and fix profile

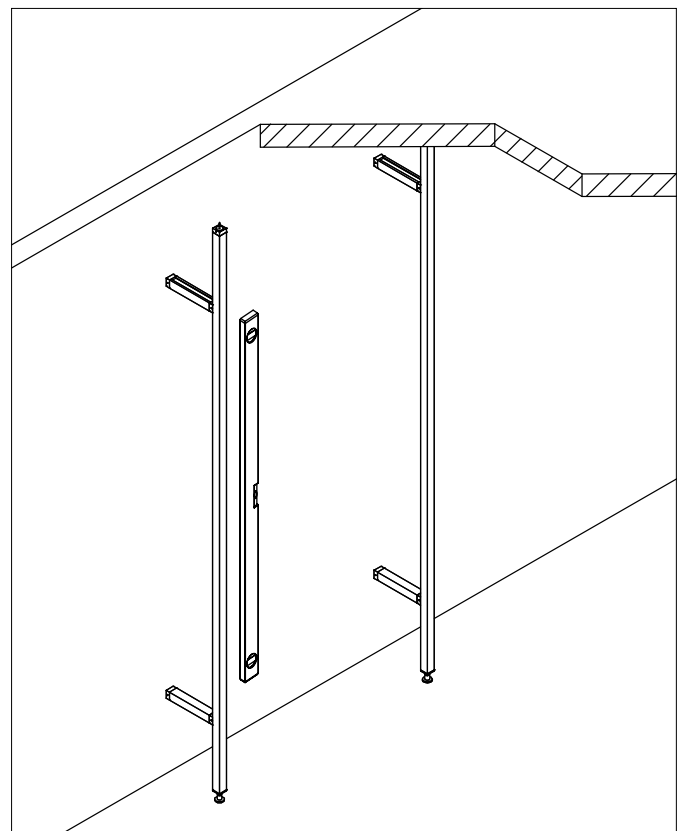


4_ Installation examples

INSTALLATION INSTRUCTIONS


SHELVES

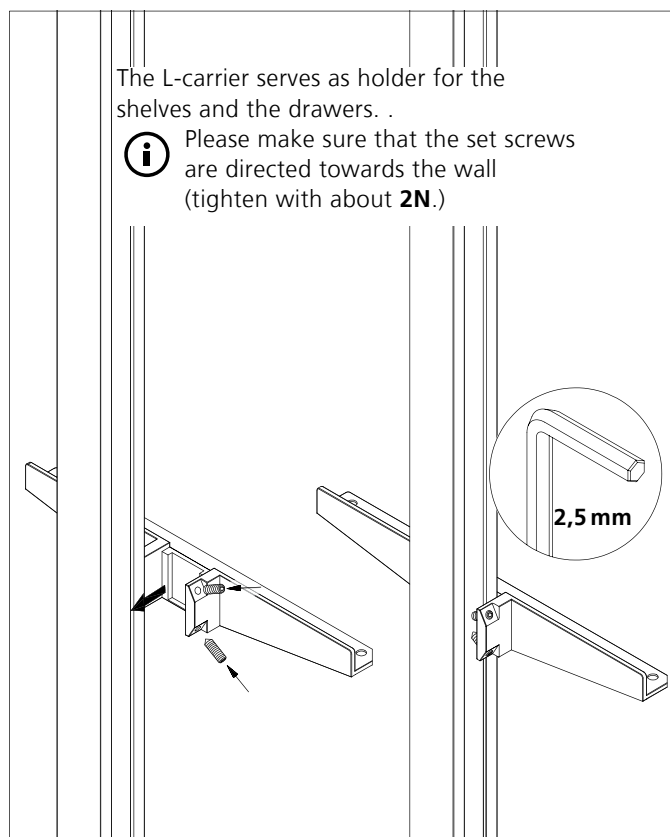


5_ Insert and fix the L-carrier (right and left)

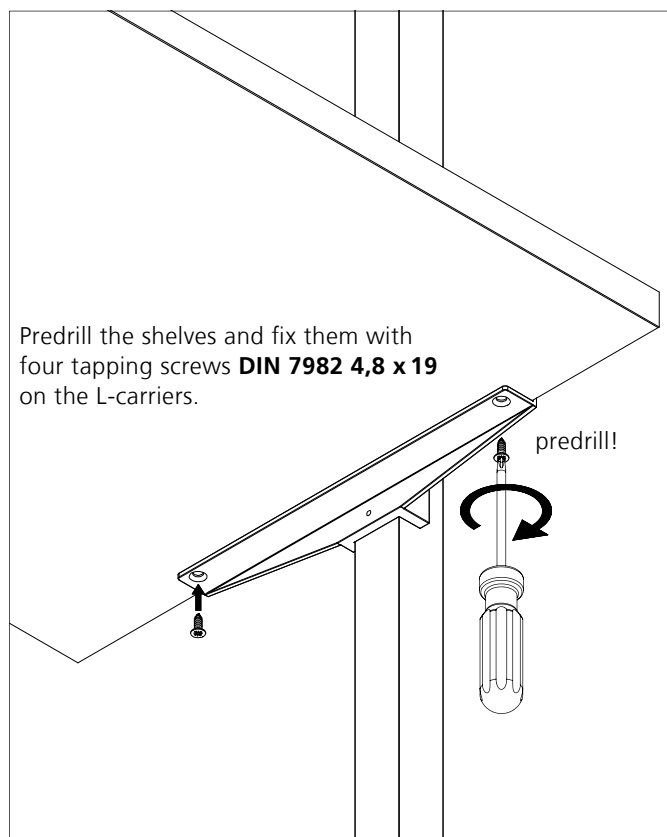

6_ Fix the shelves

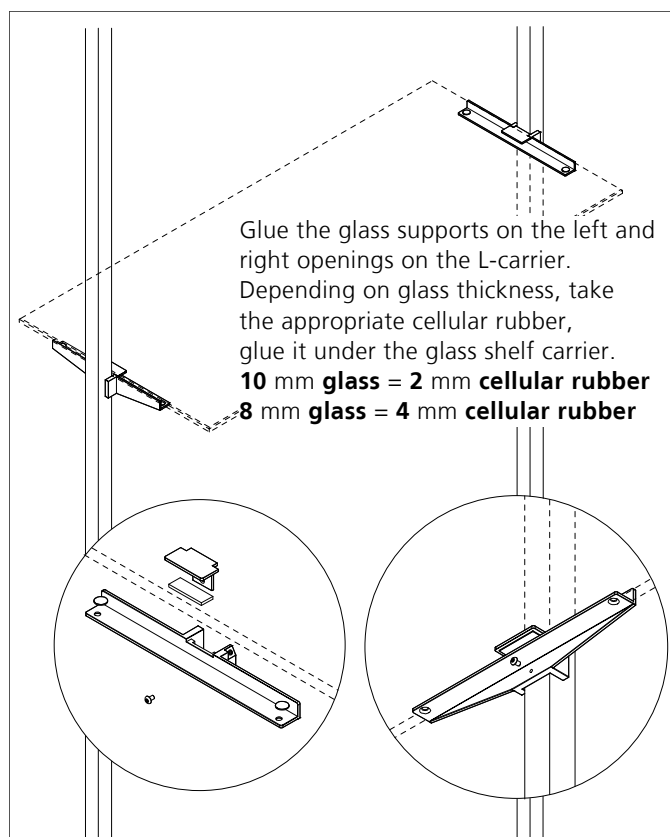


7_ Insert the attachment for glass shelf carrier

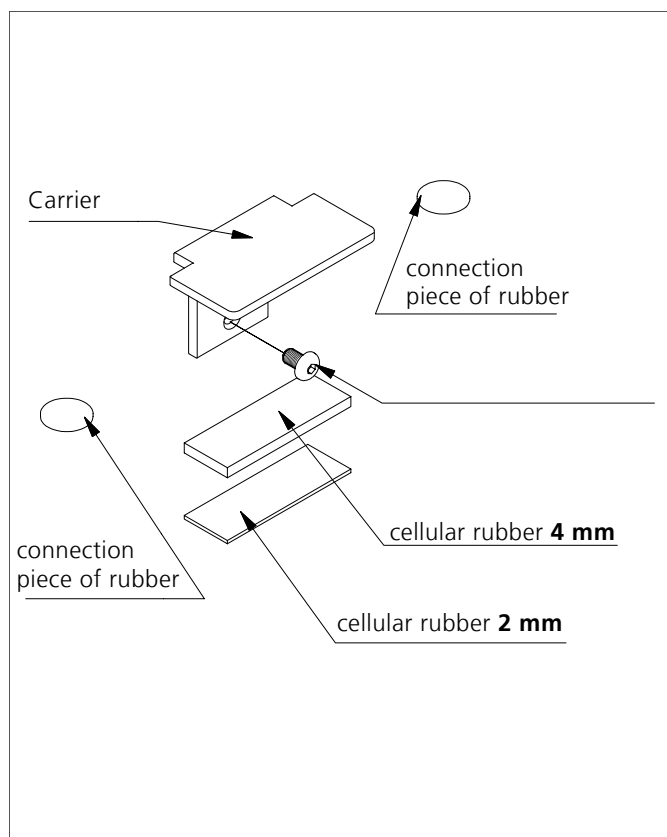


8_ Attachment for glass shelf carrier

INSTALLATION INSTRUCTIONS

DRAWER CORPUS

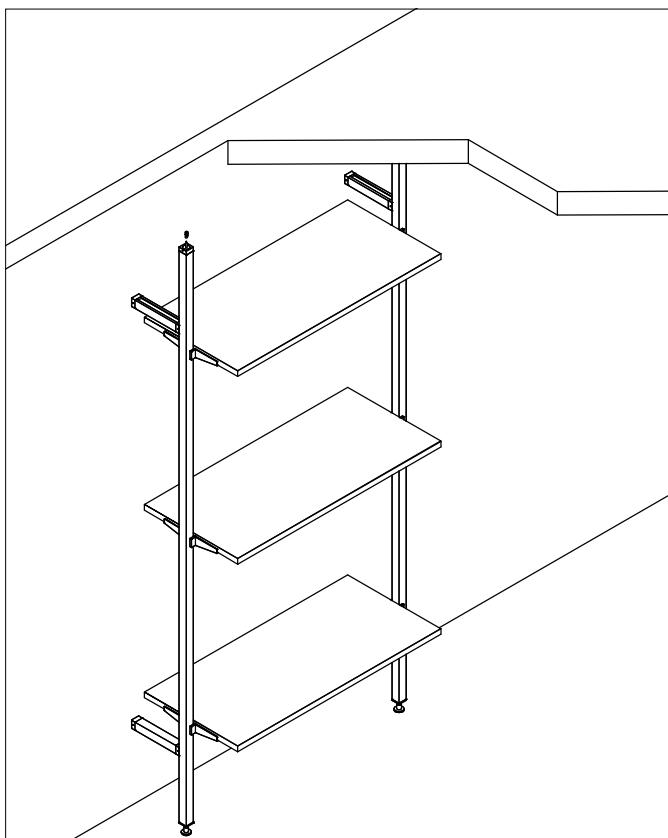


1_ Installation examples

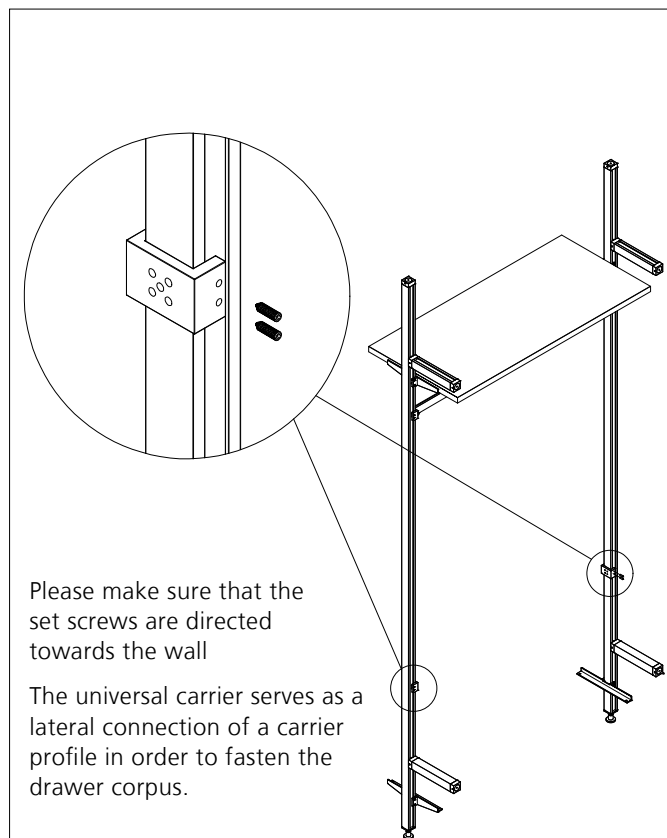


Please make sure that the set screws are directed towards the wall

The universal carrier serves as a lateral connection of a carrier profile in order to fasten the drawer corpus.

2_ Mount the universal carrier

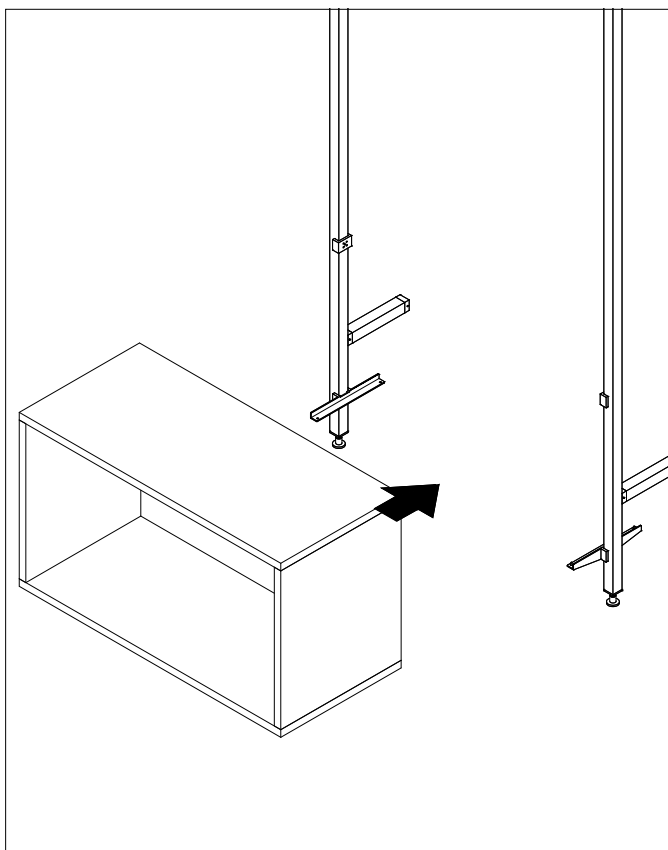

3_ Insert the drawer corpus

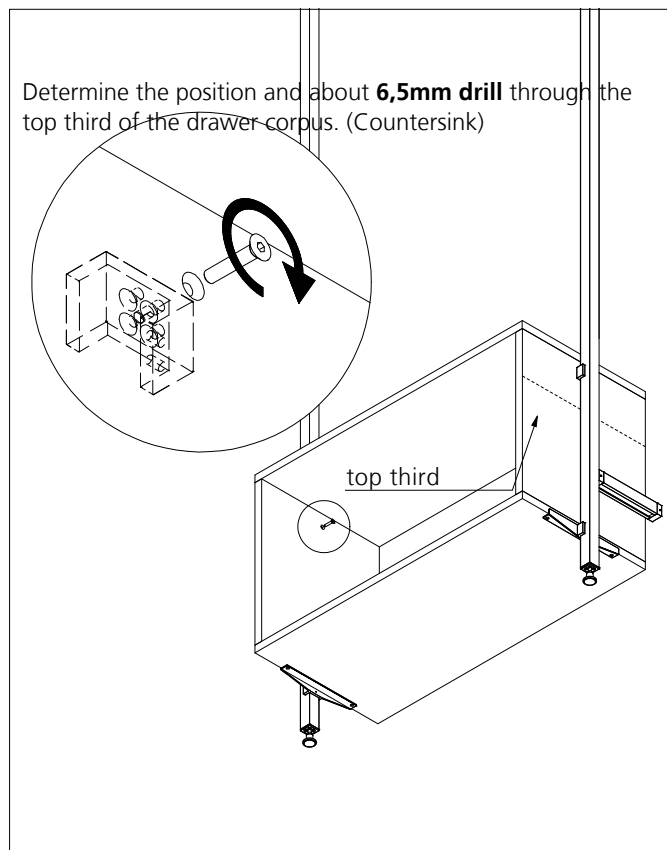


Determine the position and about **6,5mm drill** through the top third of the drawer corpus. (Countersink)


4_ Fixing with a countersink head screw **M6 x 30 mm**

INSTALLATION INSTRUCTIONS


DRAWER CORPUS

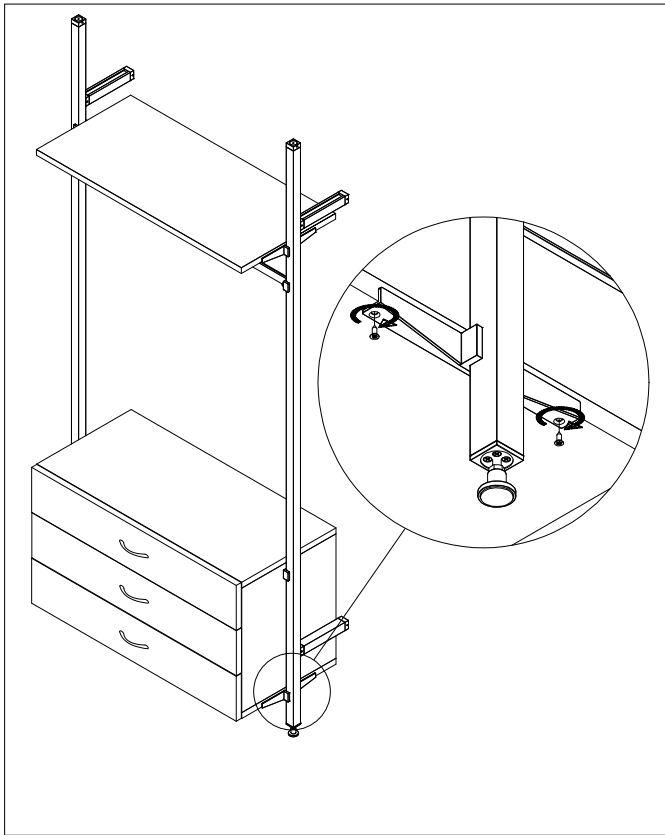


5_ Insert and fix the drawer

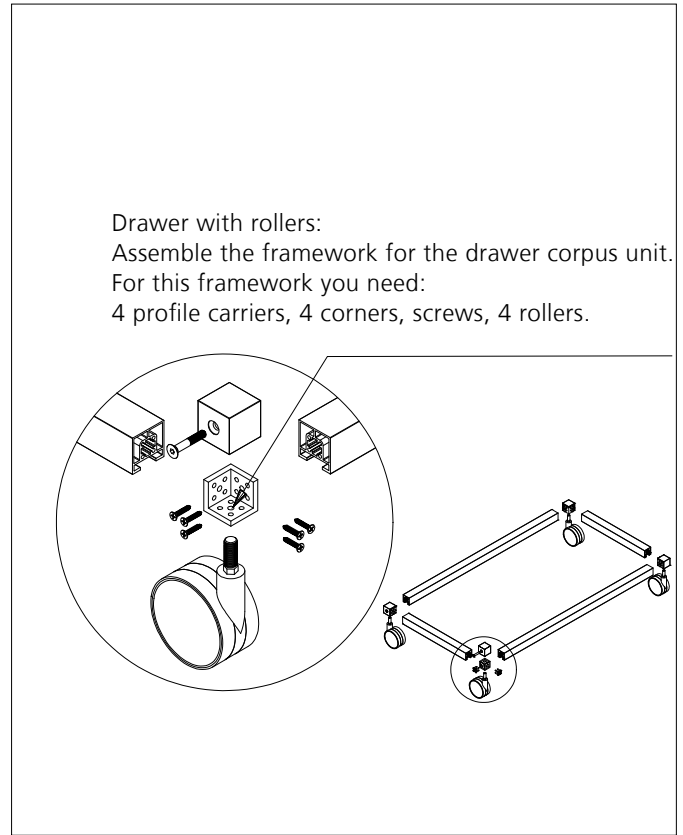

6_ Corner connection

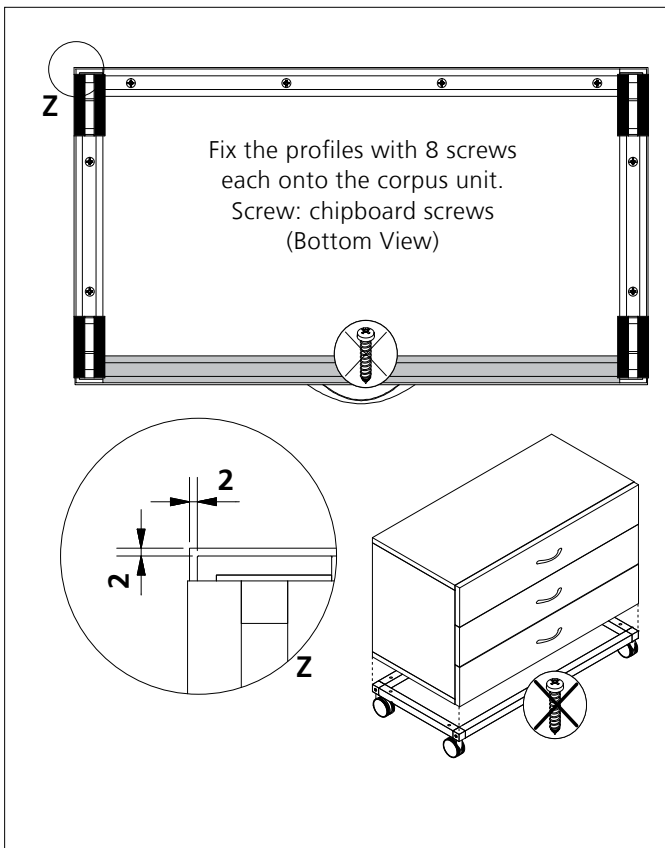


7_ Drawer with rollers

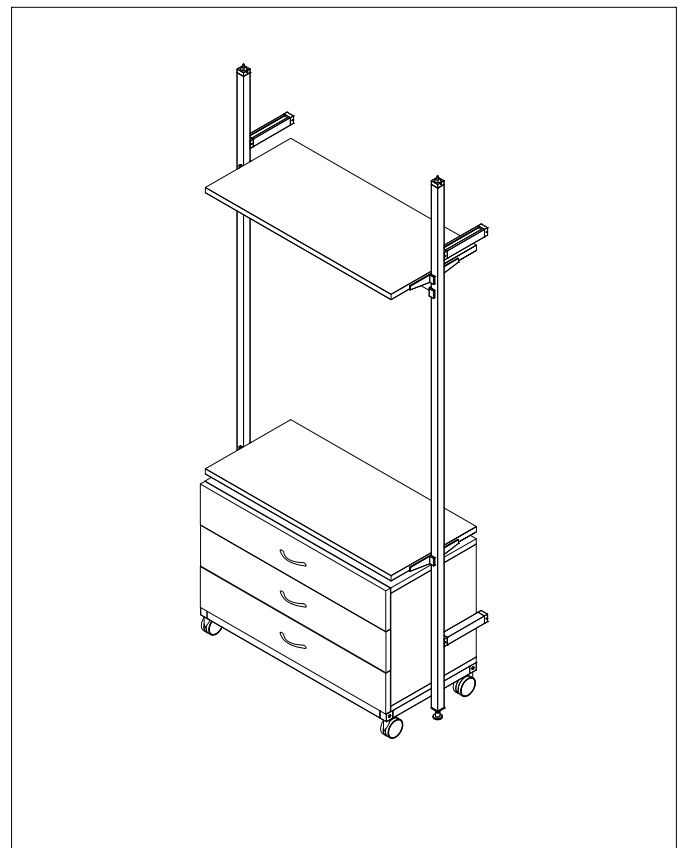


8_ Installation examples

INSTALLATION INSTRUCTIONS


CLOTHES ROD / PULL OUT TROUSER

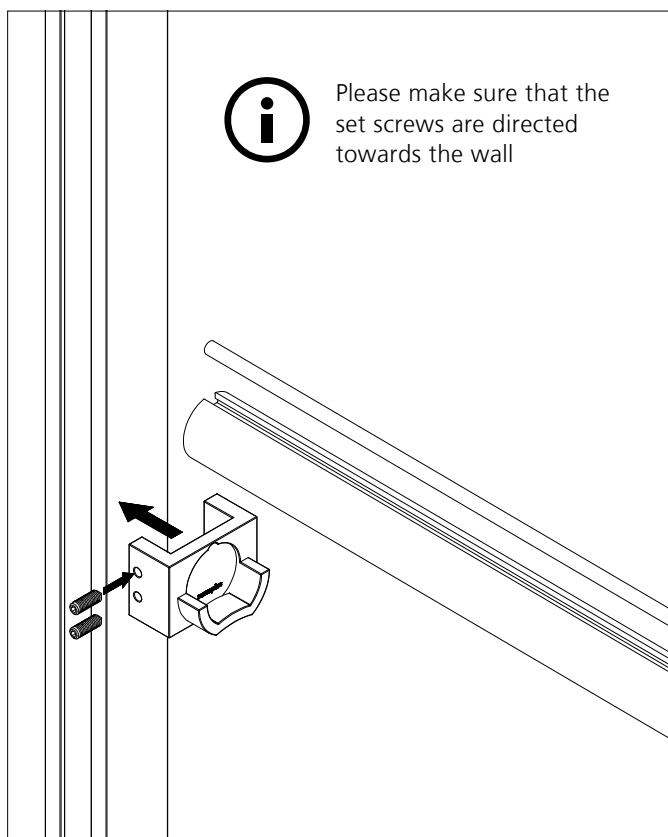

8_ Insert the Rod carrier round Uno

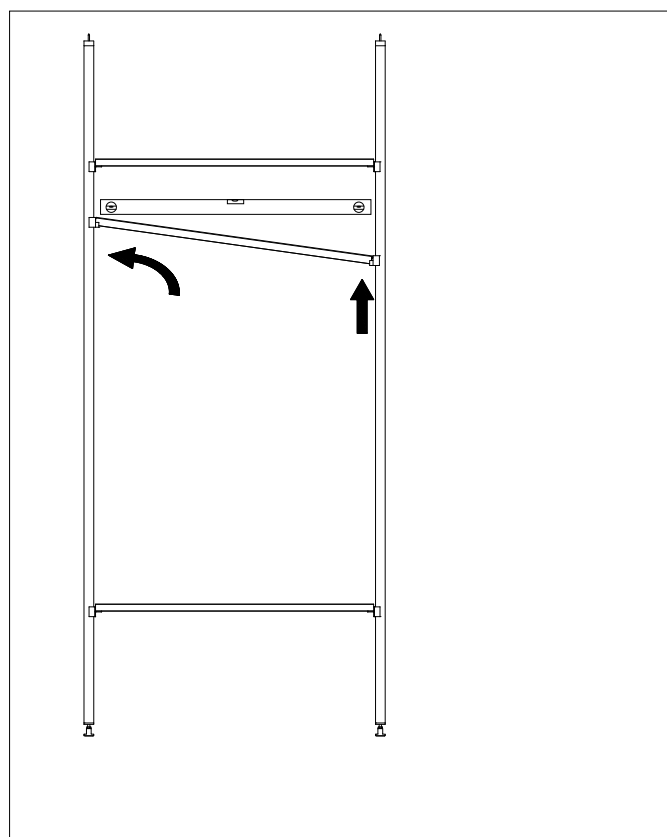


9_ Insert the clothes rod and level it

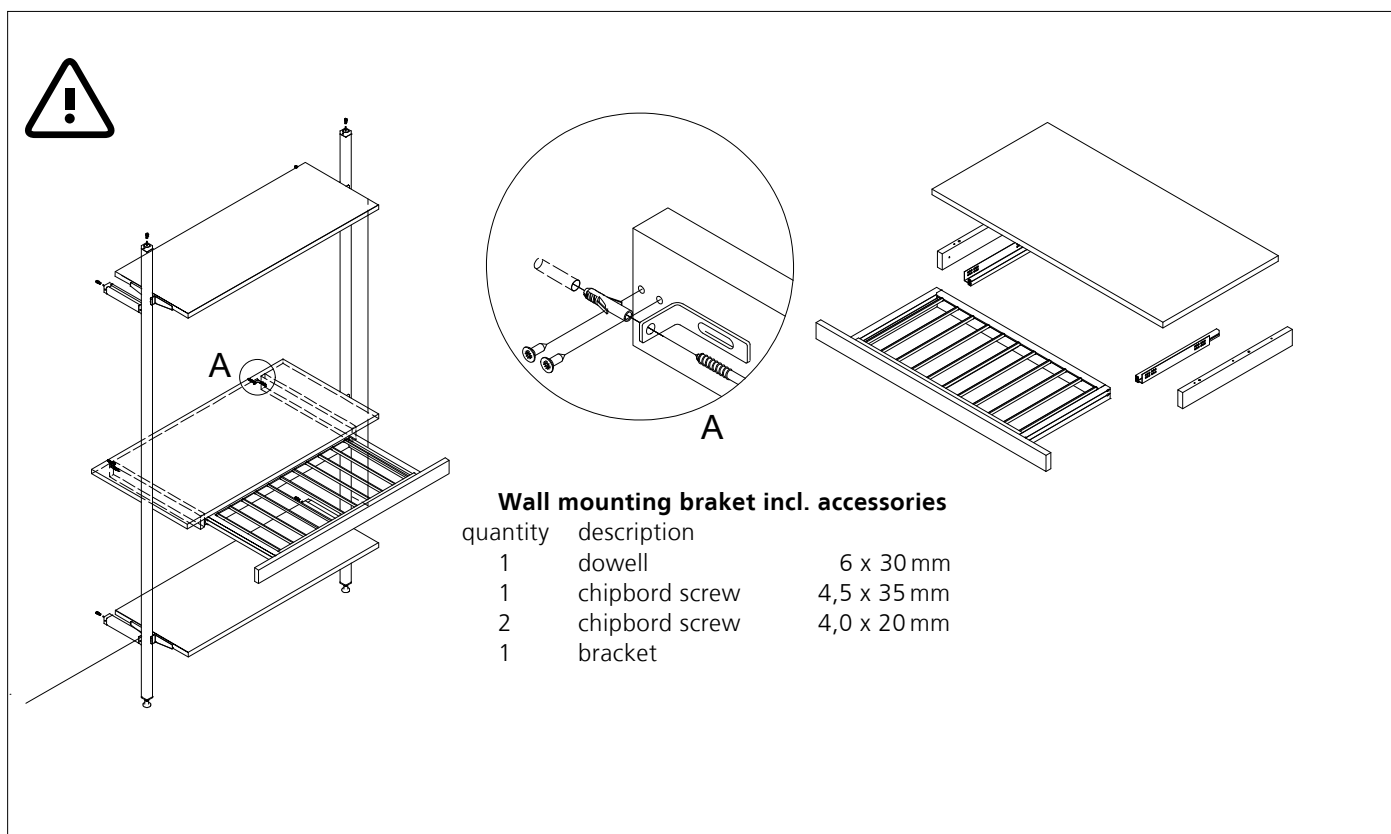

1_ Pull out trouser with front panel

ACCESSORIES

PULL OUT TROUSER WITH PANEL

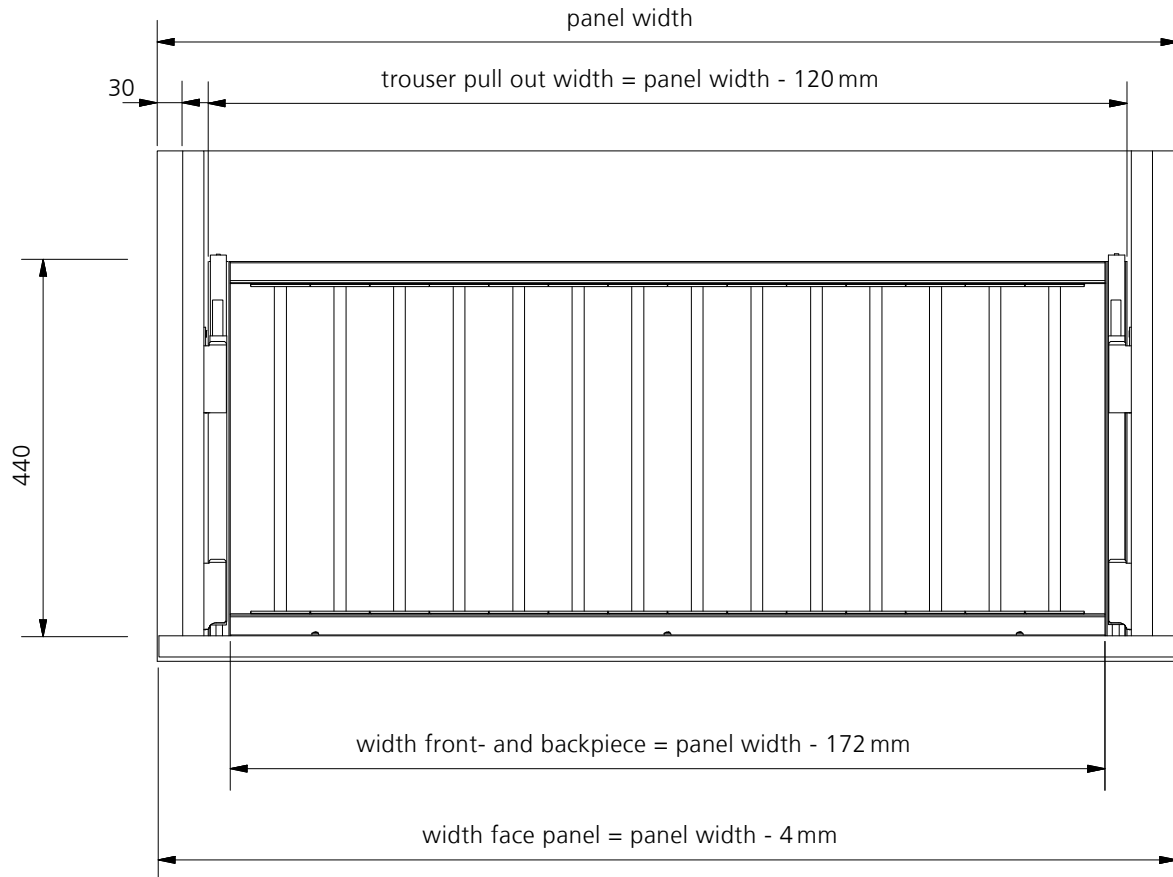

number of trousers = width front- and backpiece : 70
round results.



Maximum number of trousers per panel width:

up to	500 mm	=	4	trouser
	600	=	6	"
	700	=	7	"
	800	=	8	"
	900	=	9	"
	1000	=	10	"
	1100	=	11	"
	1200	=	12	"


ACCESSORIES




All accessories are to be mounted according to the described procedure. The set screws are directed towards the wall

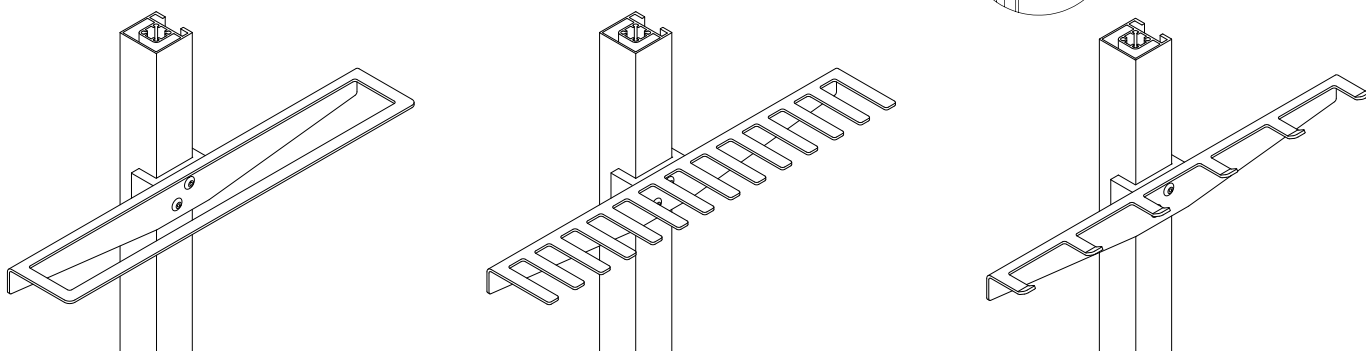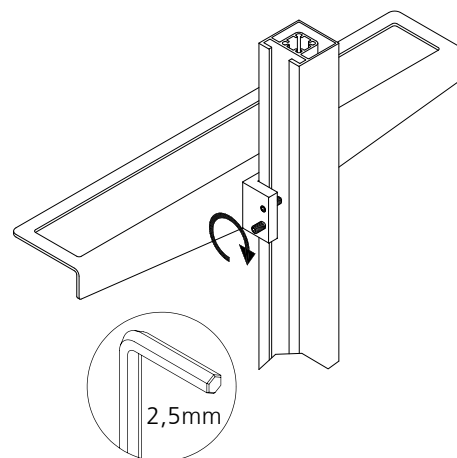

1_ Accessories: scarf holder, tie holder and hook rail (illustr, left side)

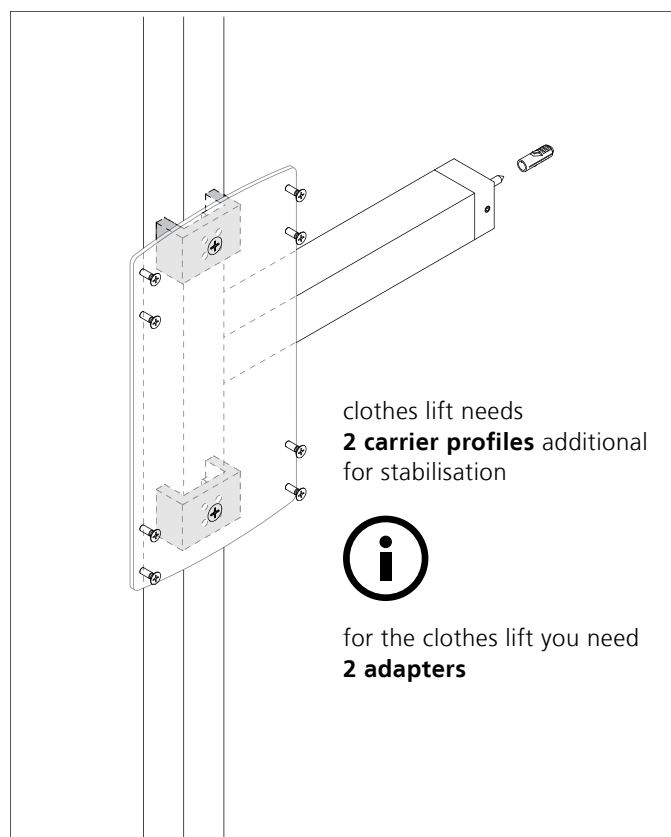


2_ Adapter for clothes lift

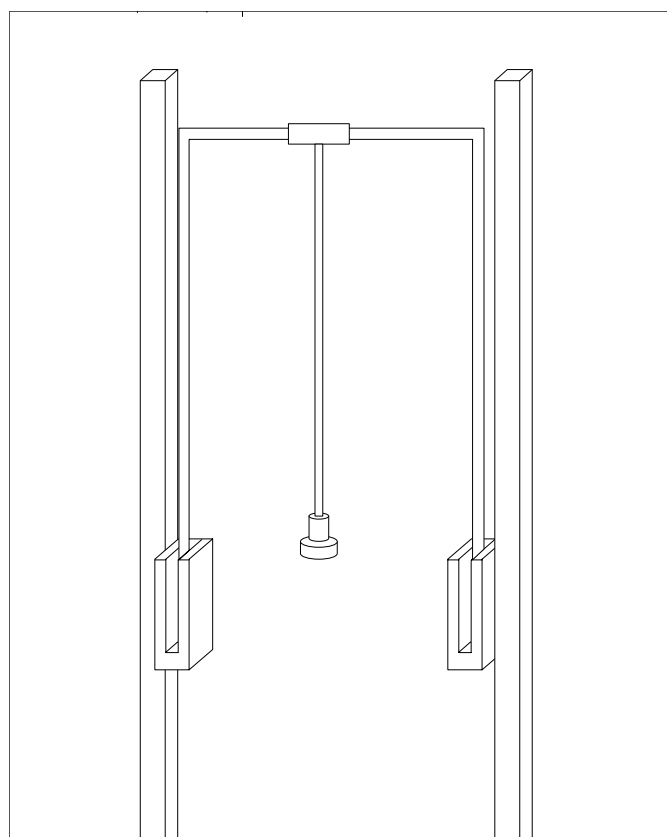


3_ Clothes lift

ACCESSORIES


UNO 45 ° WALL MOUNTING

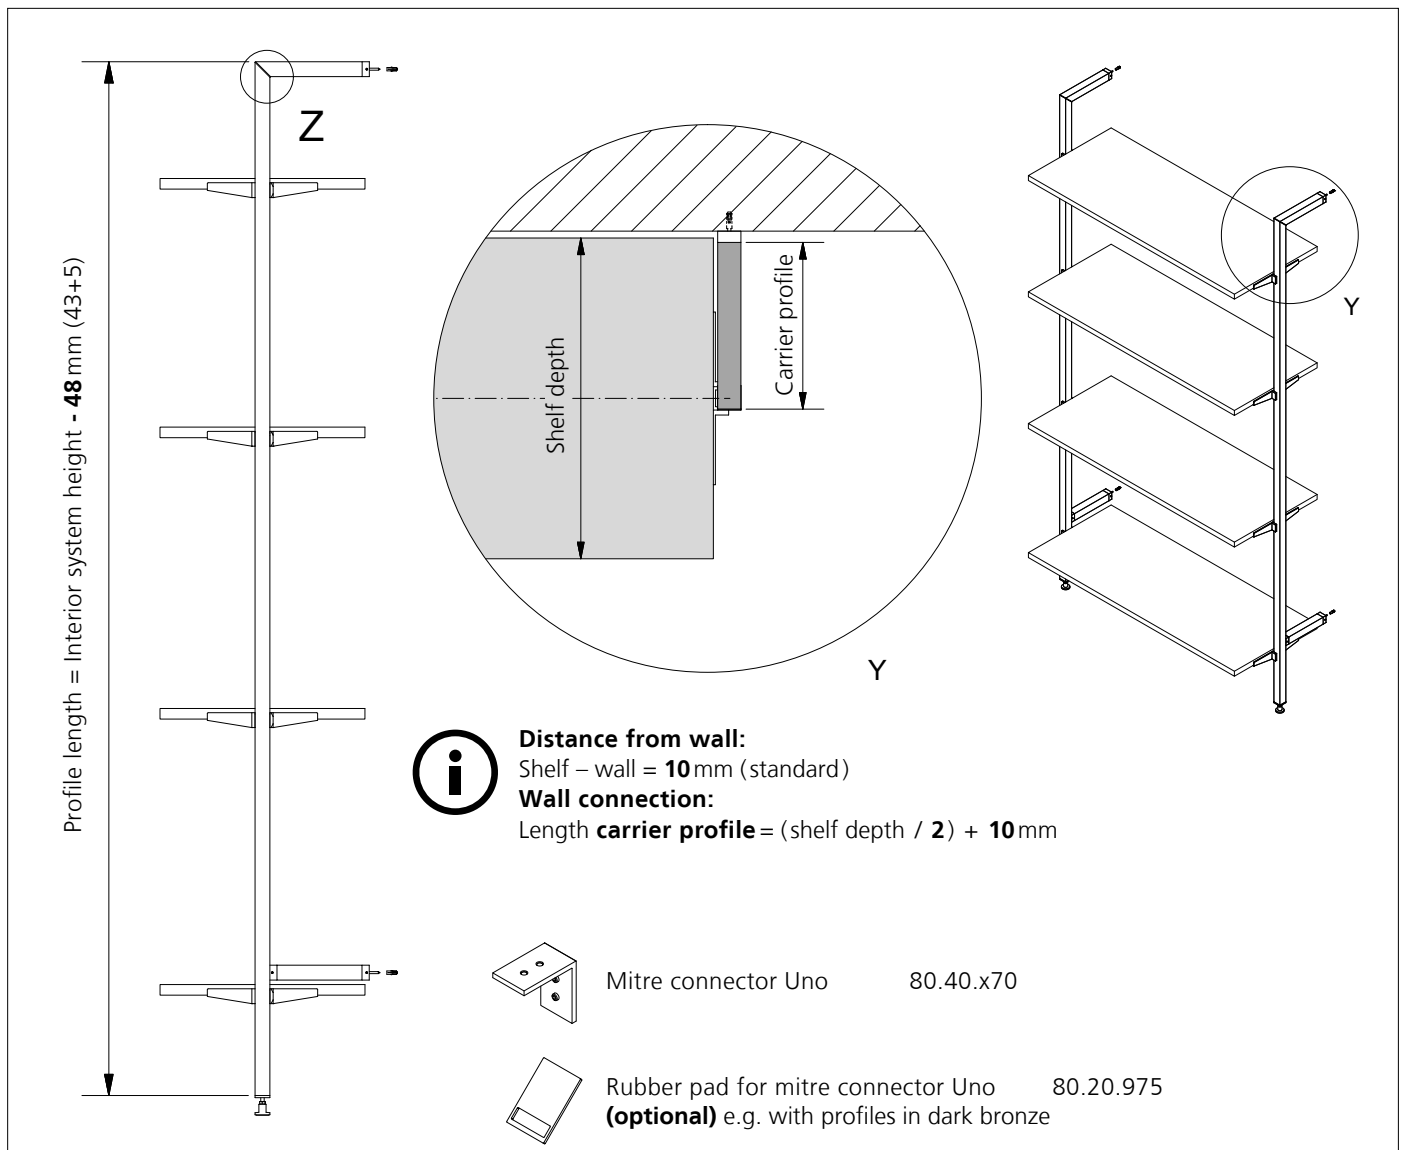


1_ Cutting dimensions for Uno 45 ° wall mounting

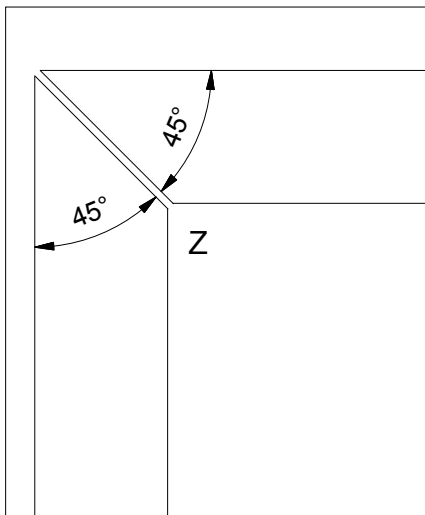

2_ Cut the profile to miter

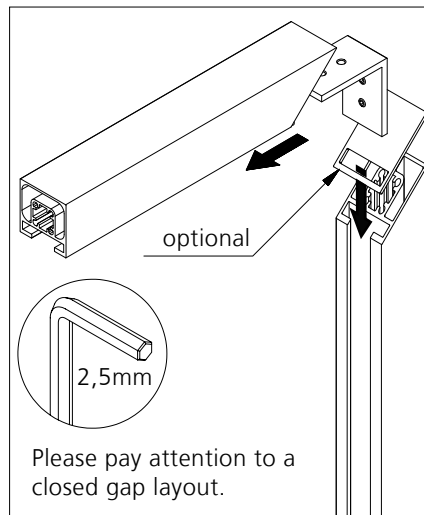


3_ Insert mitre connector Uno

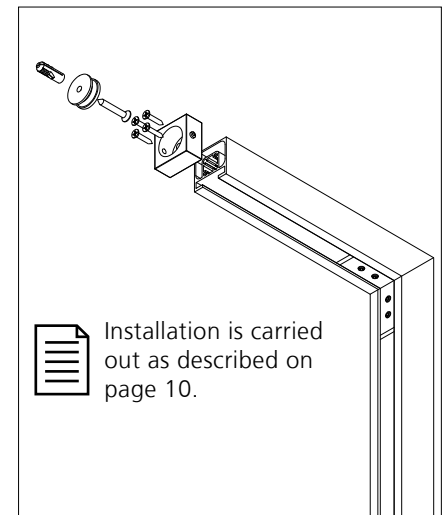

4_ Installation

ACCESSORIES

CLOTHES ROD CORNER SHELF UNO

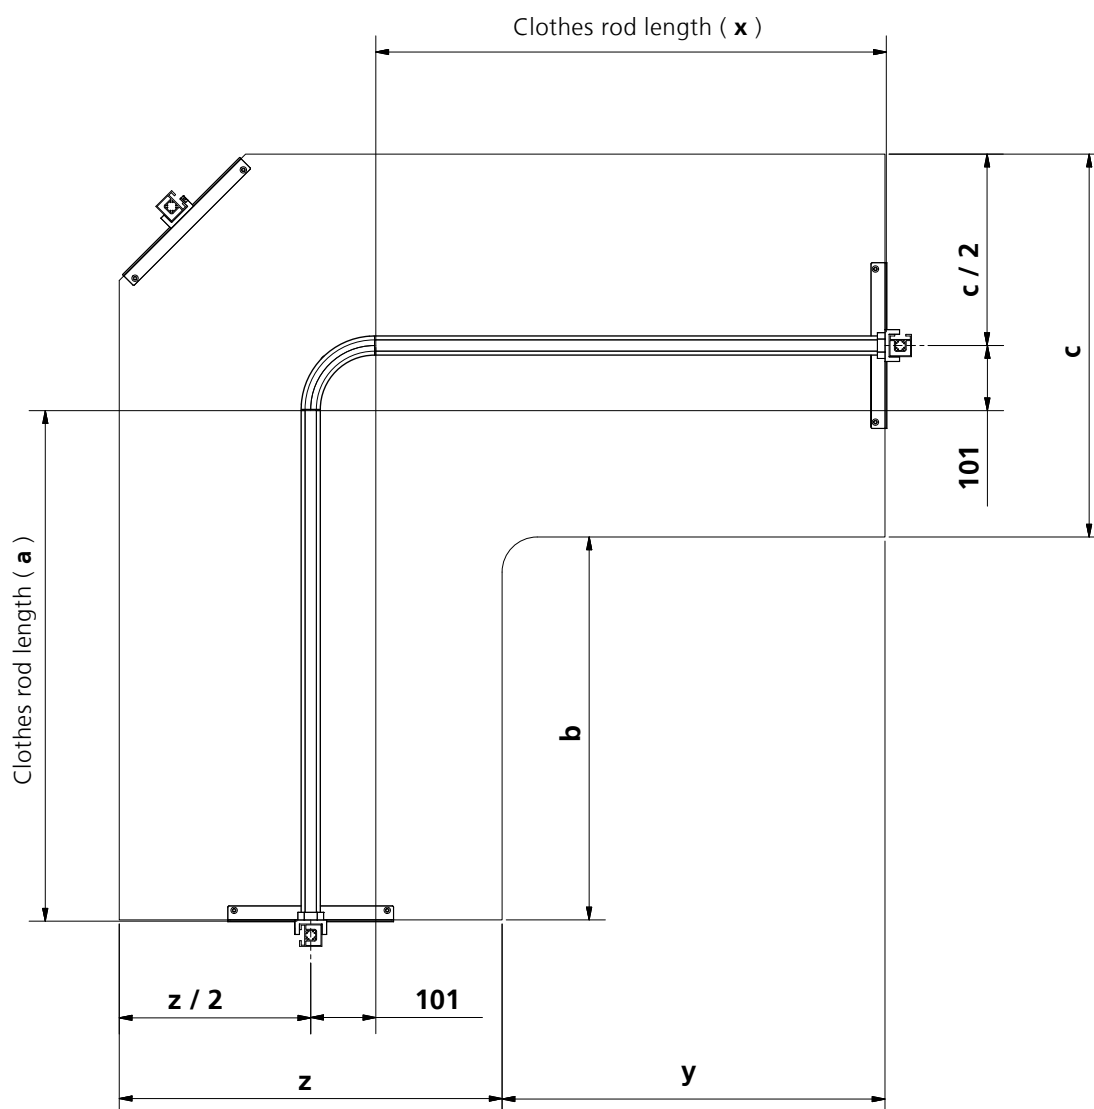

Calculating length clothes rail corner shelf Uno:

$$a = (c / 2) + b - 101$$

$$x = (z / 2) + y - 101$$

Calculating length Lisene for clothes rail:


Length Lisene = length clothes rail - **28** mm

Legend:

x / a = clothes rod length

y / b = shelf length - shelf depth


z / c = shelf depth

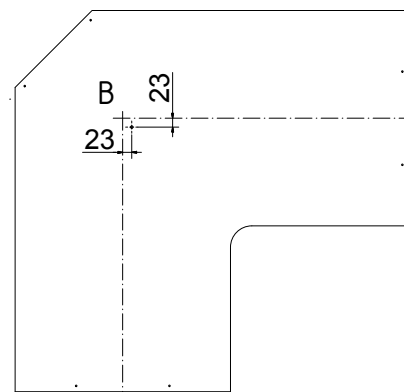


Hole B: Ø 7 mm (for the clothes rod corner connector)

ACCESSORIES

LED LIGHTING CLOTHES ROD UNO

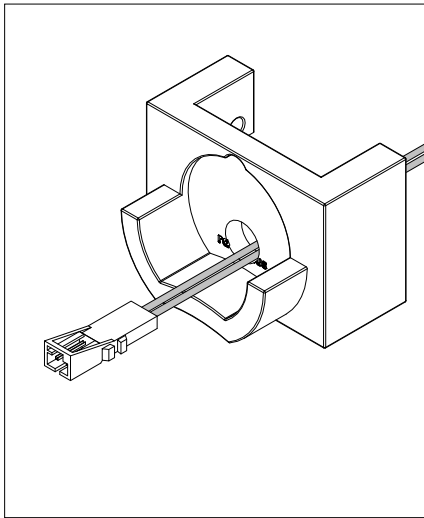


1_ Rod carrier LED, round

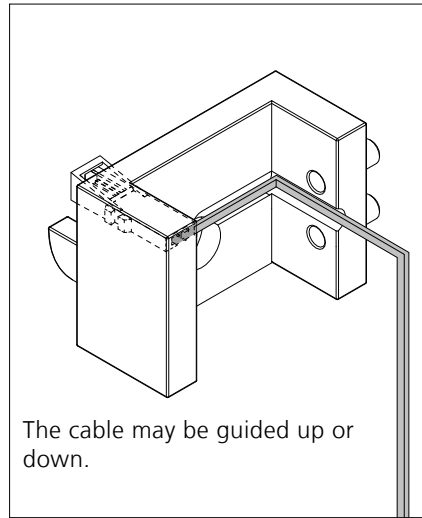


The cable may be guided up or down.


2_ Cable route

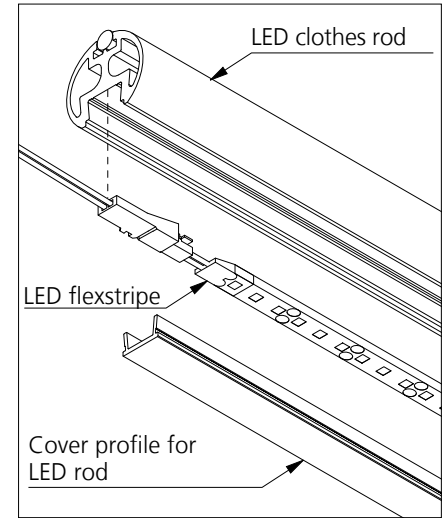


3_

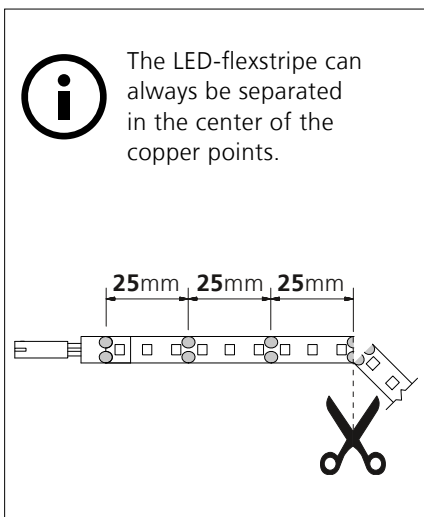

4_

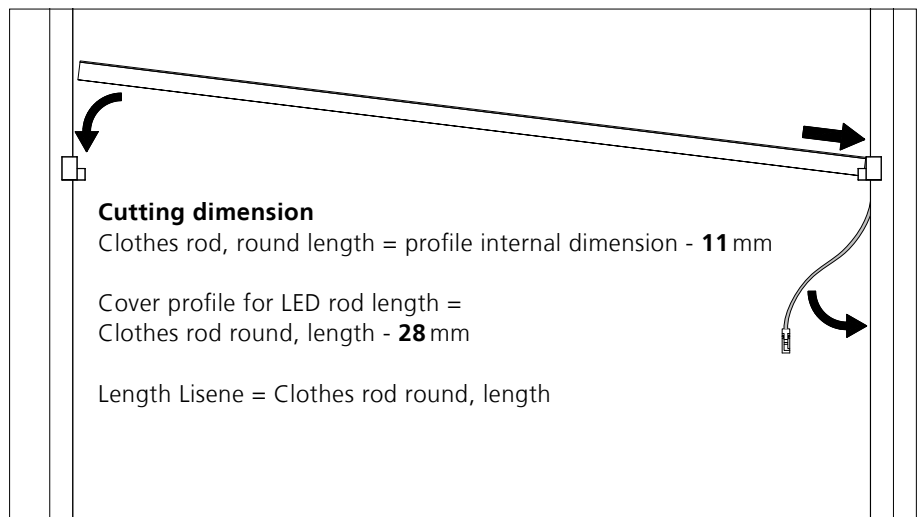


5_ Cutting dimension / inserting the Clothes rod

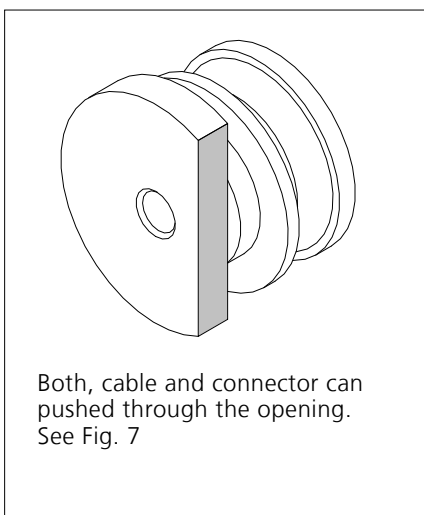


Both, cable and connector can be pushed through the opening. See Fig. 7

6_ Profile connector for LED stripe Uno

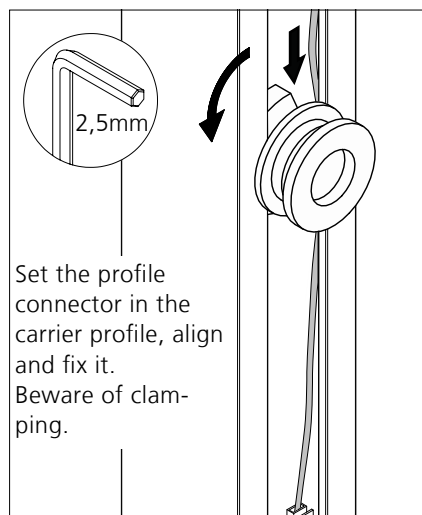

7_

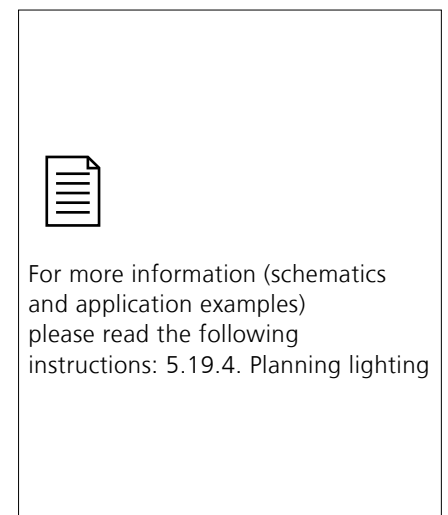

8_